


# GOT-5100TL-621

10.4" SVGA TFT Super Slim Fanless Touch Panel Computer

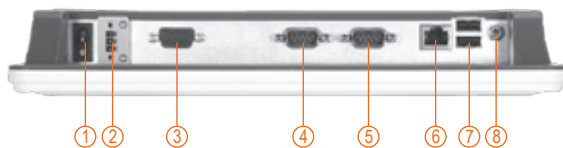

- |                           |                     |
|---------------------------|---------------------|
| 1. Power switch (AT)      | 5. COM 2 (RS-232)   |
| 2. 24 VDC power           | 6. Ethernet         |
| 3. VGA                    | 7. USB 2.0 x 2      |
| 4. COM 1 (RS-232/422/485) | 8. Audio (Line-out) |

## Features



- 10.4" SVGA (800 x 600) color TFT LCD display
- Fanless cooling system with AMD LX800 processor onboard
- Slim design: thickness 44mm
- Embedded OS: Windows® CE.NET, XP Embedded supported
- Easy for expansion: 1 MiniPCI expansion slot
- Over-current protection fuse
- Supports various mounting ways: panel/wall/VESA /stand (optional)



Side view

## Introduction

The GOT-5100TL-621 is a super slim and fanless touch panel computer specifically designed for application requiring 800 x 600 resolution. It adopts SVGA TFT display, AMD LX800 500 MHz processor and supports various operating systems of Windows XP, XPE, and CE. With the compact design, thickness of 44 mm only, the GOT-5100TL-621 is ideal for space-limited environments. Besides, the GOT-5100TL-621 is equipped with one MiniPCI slot for expansion availability. It's also equipped with CompactFlash™ card and 2.5" HDD for storage capability. Thus, the GOT-5100TL is the best solution for factory automation, machine maker operating systems and building automation.

### Super slim design: 44mm thickness

The GOT-5100TL-621 is a super slim and fanless touch panel computer for limited space applications. This fanless touch panel computer is designed around the

concept of curved lines and soft edges by incorporating a AMD LX800 processor and a streamlined mechanical layout.

### WLAN antenna support (optional)

The GOT-5100TL-621 provides a MiniPCI slot and an optional fixed rotational WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the GOT-5100TL-621 in a wireless environment.

### Various Embedded O.S supported for diverse applications

The GOT-5100TL-621 supports various embedded O.S, such as Windows® CE.NET, Windows® XP Embedded, and it provides a flexible platform for diverse applications.

## Specifications

Front Bezel	IP65, NEMA 4 rugged protection, plastic front bezel	System Memory	1 x DDR SODIMM max. up to 1GB	
LCD Panel	10.4" SVGA TFT LCD	BIOS	Award 4Mbit with RPL/PEX LAN boot ROM, Smartview and customer CMOS backup	
	Brightness (cd/m <sup>2</sup> )	230 nits	Storage	
	Resolution	800 x 600		1 x 2.5" IDE HDD (Optional)
Main System	Viewing Angel (H/V)	120° / 100°	1 x CompactFlash™	
	CPU	AMD LX800 500 MHz	Watchdog Timer	255 levels, 0-255 sec.
	Chipset	AMD LX+CS5536AD	Onboard Graphics	Integrated in AMD LX

I/O Connector	1 x RS-232 (COM 2) 1 x RS-232/422/485 (COM 1) 2 x USB 2.0 1 x 10/100Mbps Ethernet 1 x Audio (Line-out) 1 x VGA
Expansion Interface	1 x MiniPCI slot
Touchscreen	Resistive type
Power Supply	24V <sub>dc</sub> , w/ over-current protection fuse
Dimensions	293mm (11.53") (W) x 44.6mm (1.76") (D) x 236mm (9.29") (H)
Weight (net/gross)	1.6 kg (3.52 lb)/2.8 kg (6.17 lb)
Environmental	Operation temperature: 0°C - +50°C (32°F - 122°F) (in airflow condition) 0°C - +45°C (32°F - 113°F) Relative humidity: 10% - 95% @40°C; non-condensing Operation vibration: 2G, 5 - 500Hz, random for CompactFlash™
Certification	CE

### Ordering information

GOT-5100TL-621	10.4" SVGA TFT compact fanless touch panel computer
50966A23020E	Power adapter, 72W, 110-230V <sub>ac</sub> to 24V <sub>dc</sub>
E225840102	Desktop stand
E989110035	VESA ARM clamp type
E989110036	VESA ARM wall mount type
Wireless kit	802.11 b/g wireless LAN kit

\*Specifications and certifications are limited to optional.

### Optional EOS Installation

Windows® CE.NET  
Windows® XP Embedded

### Optional OS Installation

Windows® XP



Desktop stand

### Dimensions

